


CLASSE H2 BORDO PONTE - BARRIERA TUBOLARE PER MANUFATTO W3


Class H2 Bridge Side - Tubular guardrail W3
Brücken-Schutzplanke Klasse H2 - Rohrgeländer für Bauwerke W3
Classe H2 Bord de pont - Barrière tubulaire W3
Clase H2 Borde de puente - Barrera tubolar W3

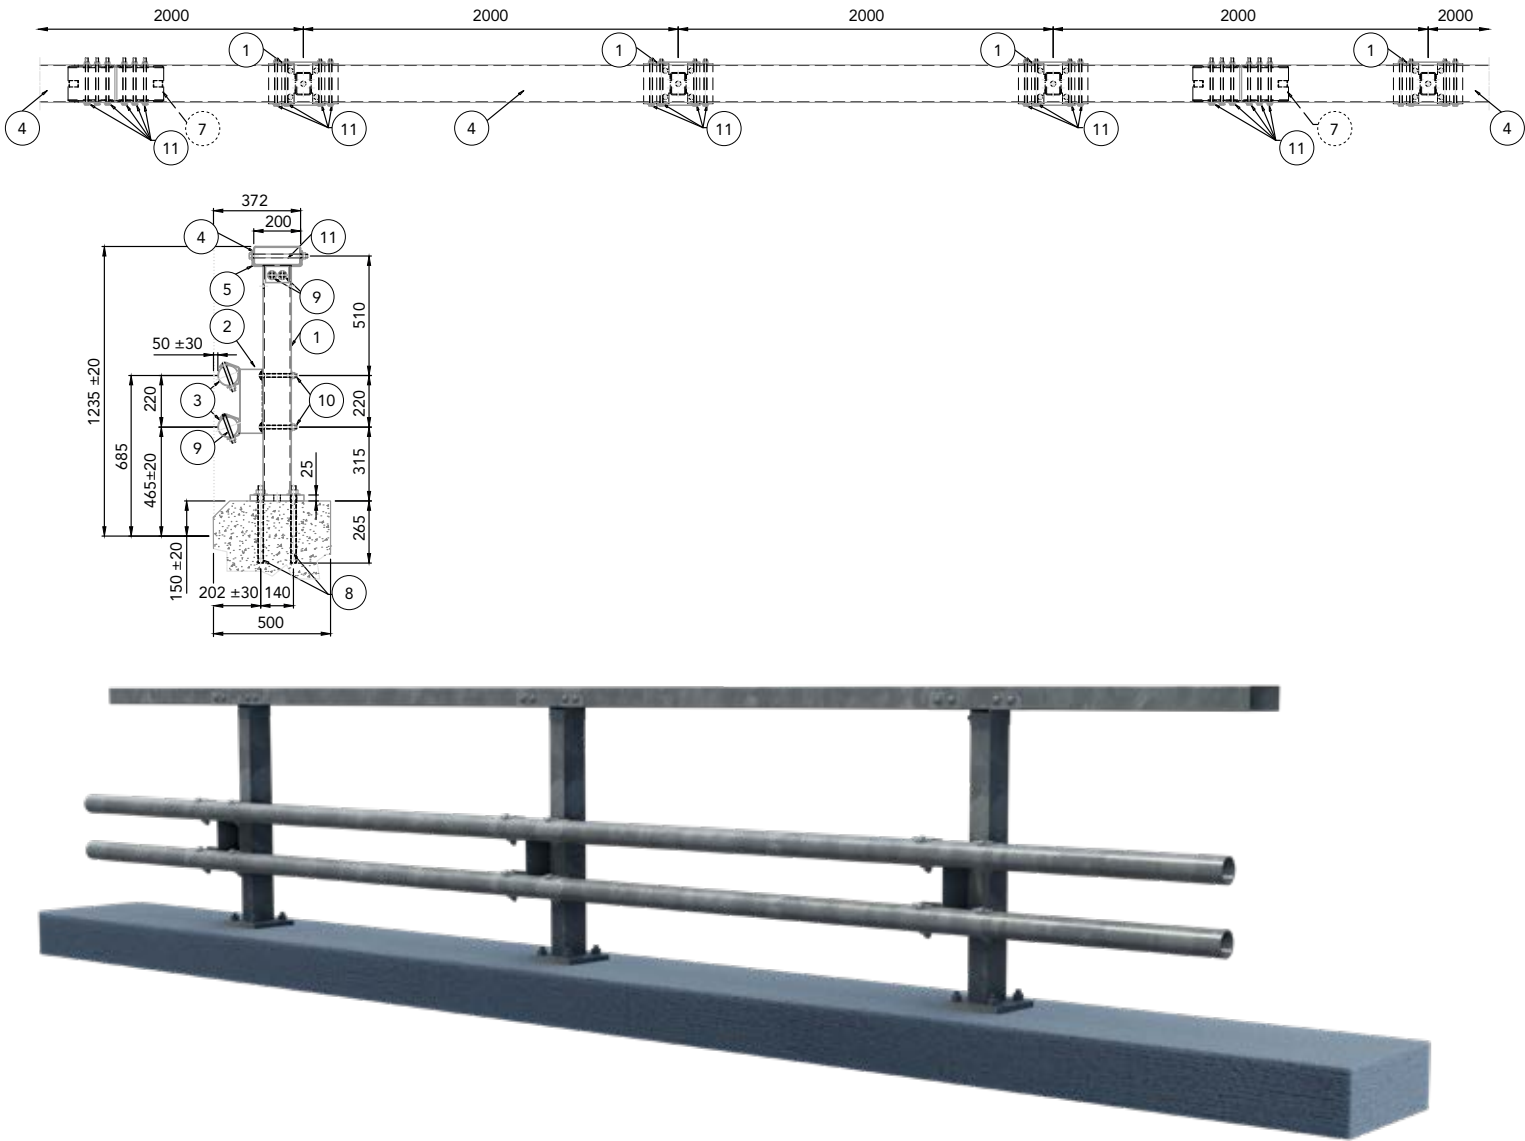

Caratteristiche Characteristics, Eigenschaften, Caractéristiques, Características											
Altezza fuori terra	Height above ground level,	Höhe über Grundboden,	Hauteur hors sol,	Altura sobre el suelo							1235 mm
Ingombro trasversale	Overall width,	Gesamtbreite,	Grosueur hors tout,	Anchura total							372 mm
Interasse pali	Post spacing,	Steherabstand,	Distance entre poteaux,	Distanca entre postes							2000 mm

Rapporti di prova Crash test reports, Testberichte, Comptes rendus d'essais, Relaciones de pruebas											
Test n.	Facility	Test	Type	Barrier length m	Mass kg	Speed km/h	ASI	THIV max 33 km/h	D m	Vi m	W m
PROVA 2872	AISICO	TB11	Laterale 20°	77,48	900	100	1,70=C	32	0,3		0,4=W1
PROVA 2871	AISICO	TB51	Laterale 20°	77,48	13.000	70			0,6	0,9=VI3	1,0=W3

H2 BALTIC

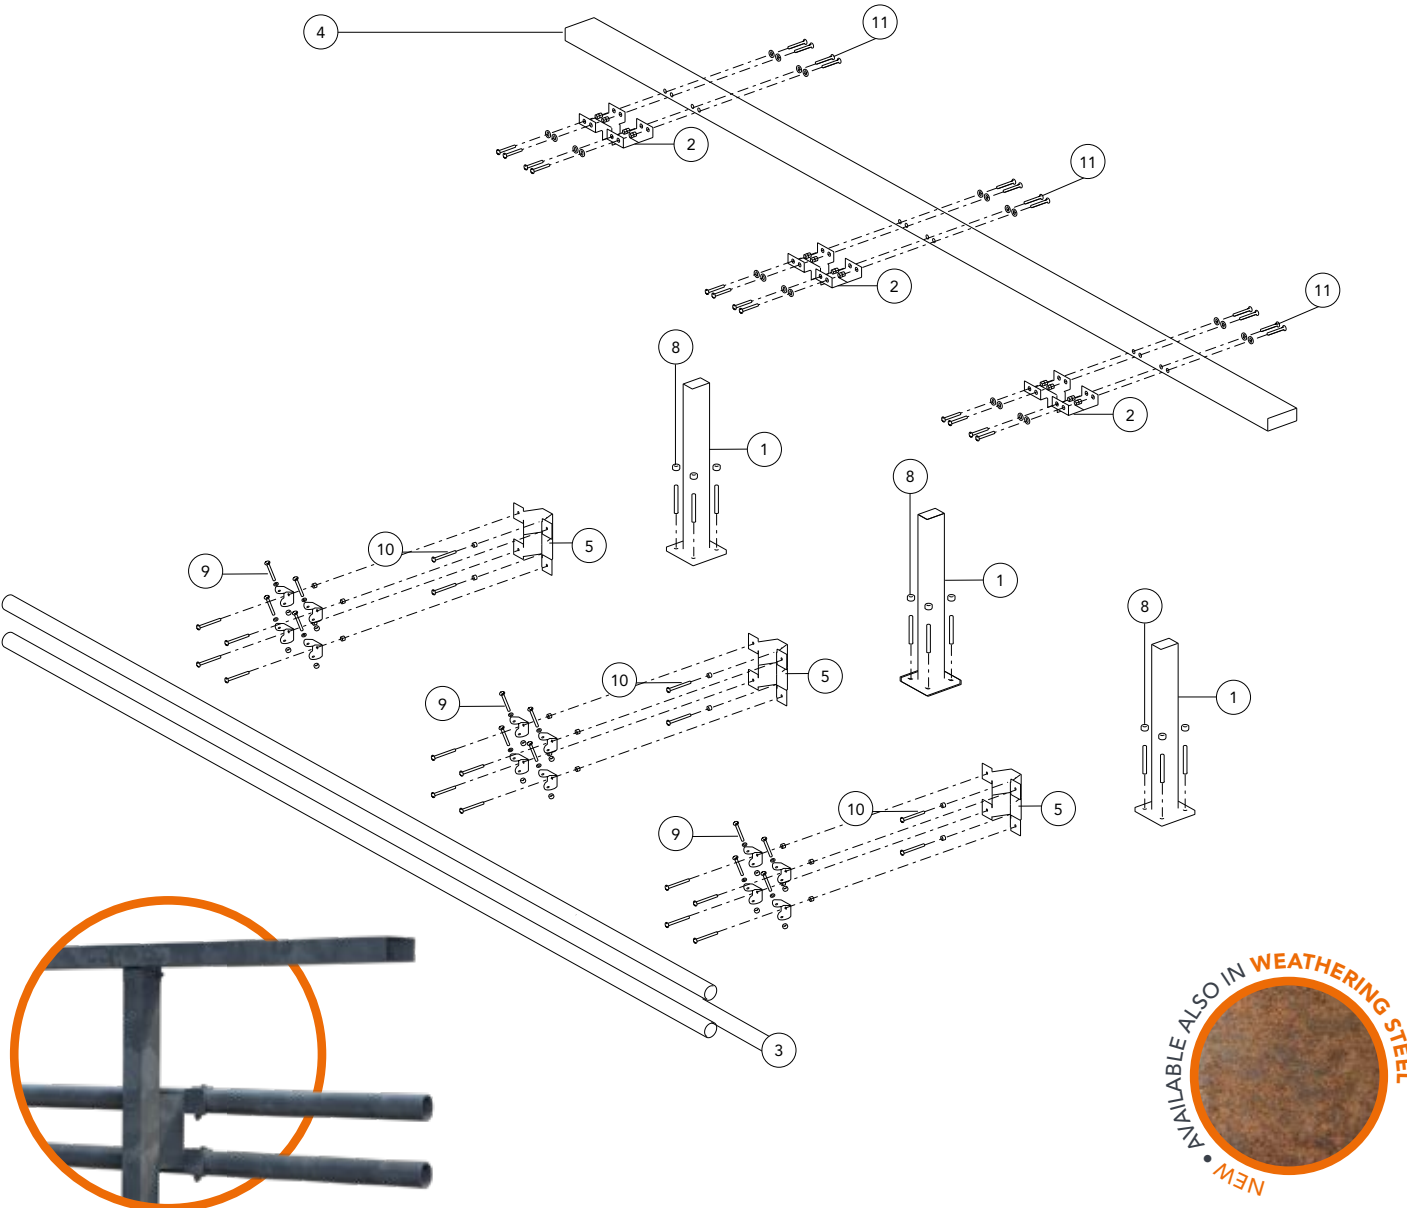

Componenti Components, Bauteile, Composants, Elementos			
Descrizione Description		Materiale Material	
11	Bullone completo Bolt with nut and washer, Schraube komplett, Boulon complet, Tornillo completo con tuerca y arandela	M16x240 mm	Classe 8.8
10		M16x150 mm	Classe 8.8
9		M16x120 mm	Classe 8.8
8	Tirafondo completo di dado e rondella Anchor bolt with nut and washe, Ankerbolzen mit Mutter und Unterlegscheibe, Tire-fond avec écrou et rondelle, Varilla de anclaje con tuerca y arandela	M24x330 mm	Classe 8.8
7	Manicotto Sleeve, Muffe, Manchon, Manguito	180x60x4.0 L=510 mm	S 355 JR
6	Manicotto Sleeve, Muffe, Manchon, Manguito	Ø 80x3.0 L=500 mm	S 355 JR
5	Staffa di supporto trave superiore Upper beam support bracket, Halterung für oberen Träger, Support de poutre supérieure, Soporte de viga superior		S 355 JR
4	Trave superiore Upper T-beam, Geländerträger, Poutre supérieure, Viga superior	200x80x3.0 L=5990 mm	S 355 JR
3	Corrente tubolare Tubular rail, Rohrholm, Lisse tubulaire, Larguero tubular	Ø 88.9x3.0 L=5990 mm	S 355 JR
2	Distanziatore sagomato Shaped spacer, Geformter Abstandhalter, Entretoise profilée, Separador conformado	Th=3 mm	S 355 JR
1	Palo con piastra Rectangular tube post with base plate, Vierkanrohrsteher mit Grundplatte, Poteau tubulaire avec plaque, Poste de tubo con placa	120x80x5 mm 230x230x25 mm	S 355 JR